
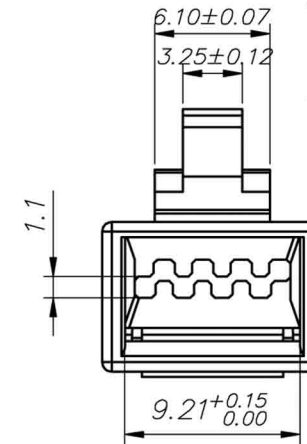
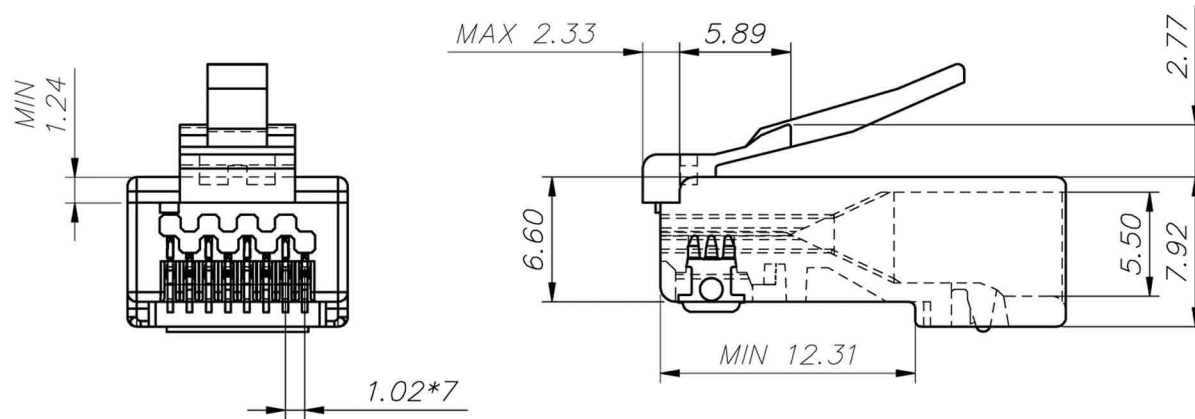


ROHS Compliant

Code: PXSPDY6e2

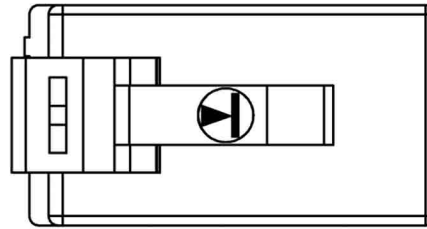

SPECIFICATIONS

1.ELECTRICAL:

UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 VOLTS AC. 60 SEC.
INSULATION RESISTANCE: 500 MΩ.
CONTACT RESISTANCE: 20mΩ MAX.
OPERATING AMBIENT TEMPERATURE: -40°C ~ 70°C.

2.MECHANICAL:

STRAIN RELIEF: 20 POUNDS / 9Kg MIN
DURABILITY: 1200 MATING CYCLES.

3.MATERIAL:

HOUSING: POLYCARBONATE, UL94V-0
COLOR: TRANSPARENT
CONTACT BLADE: COPPER ALLOY.
GOLD PLATING: 50μ"/1.27 μm

4. USAGE:

SUITABLE FOR STRANDED & SOLID WIRE 23 ~ 26 AWG
(It can be used for the wire OD from Ø 0.96 ~ 1.05mm)

BLADE:	
GOLD PLATING	50u"

