
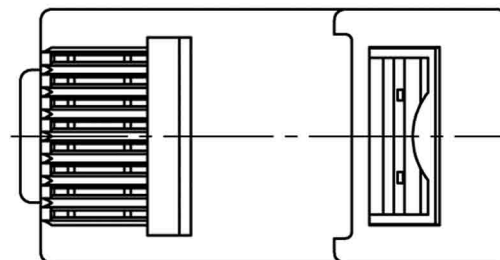
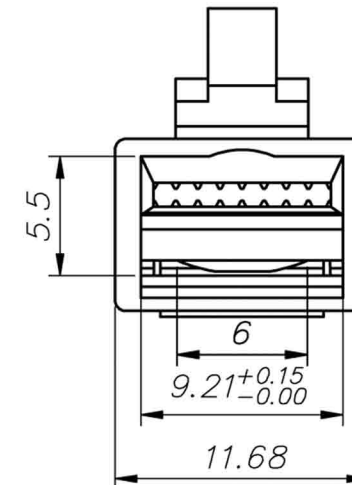
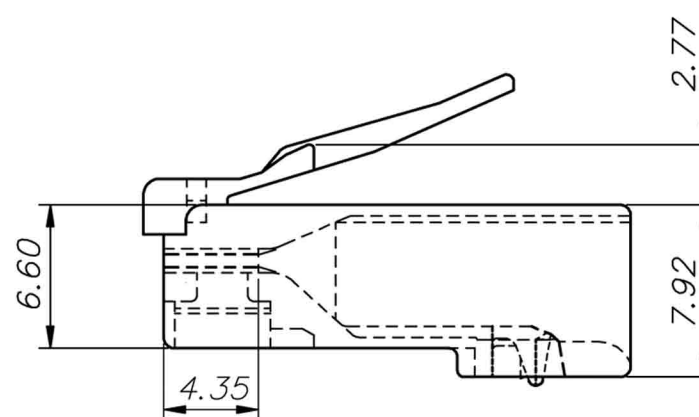
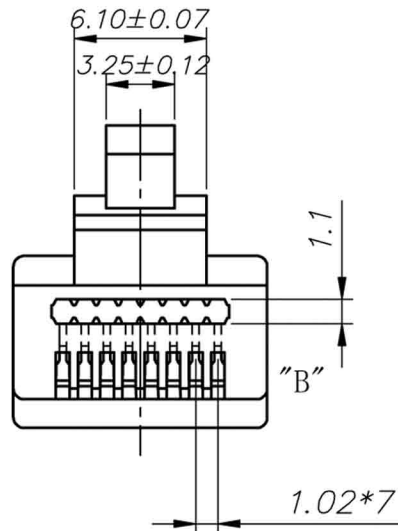


ROHS Compliant

Code: PXSPDY6e

SPECIFICATIONS

- 1.ELECTRICAL:
 - UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS.
 - DIELECTRIC WITHSTANDING VOLTAGE : 1000 VOLTS AC. 60 SEC.
 - INSULATION RESISTANCE: 500 MΩ.
 - CONTACT RESISTANCE: 20mΩ MAX.
 - OPERATING AMBIENT TEMPERATURE: -40°C ~ 70°C.
- 2.MECHANICAL:
 - STRAIN RELIEF: 20POUND MIN.
 - DURABILITY: 1200 MATING CYCLES.
- 3.MATERIAL:
 - HOUSING: POLYCARBONATE, UL94V-0
 - COLOR: TRANSPARENT
 - CONTACT BLADE: COPPER ALLOY.
 - GOLD PLATING: 50u"/1.27 μm
4. USAGE:
 - SUITABLE FOR STRANDED & SOLID WIRE 24AWG ~ 26 AWG.
 - (It can be used for the wire OD from Ø 0.96 ~ Ø1.02)

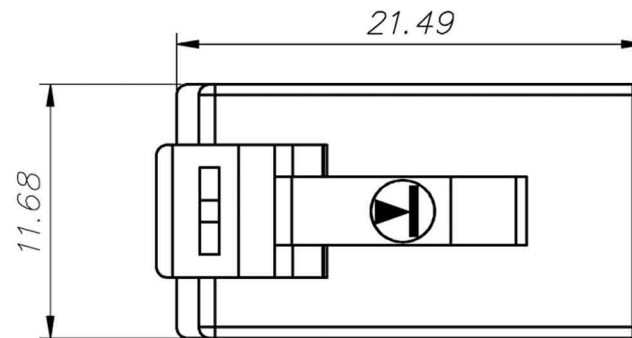

BLADE:	Z
Drawing	
GOLD PLATING	50u"
CABLE TYPE	ROUND