


ROHS Compliant

Code: PXSPDY6Sb

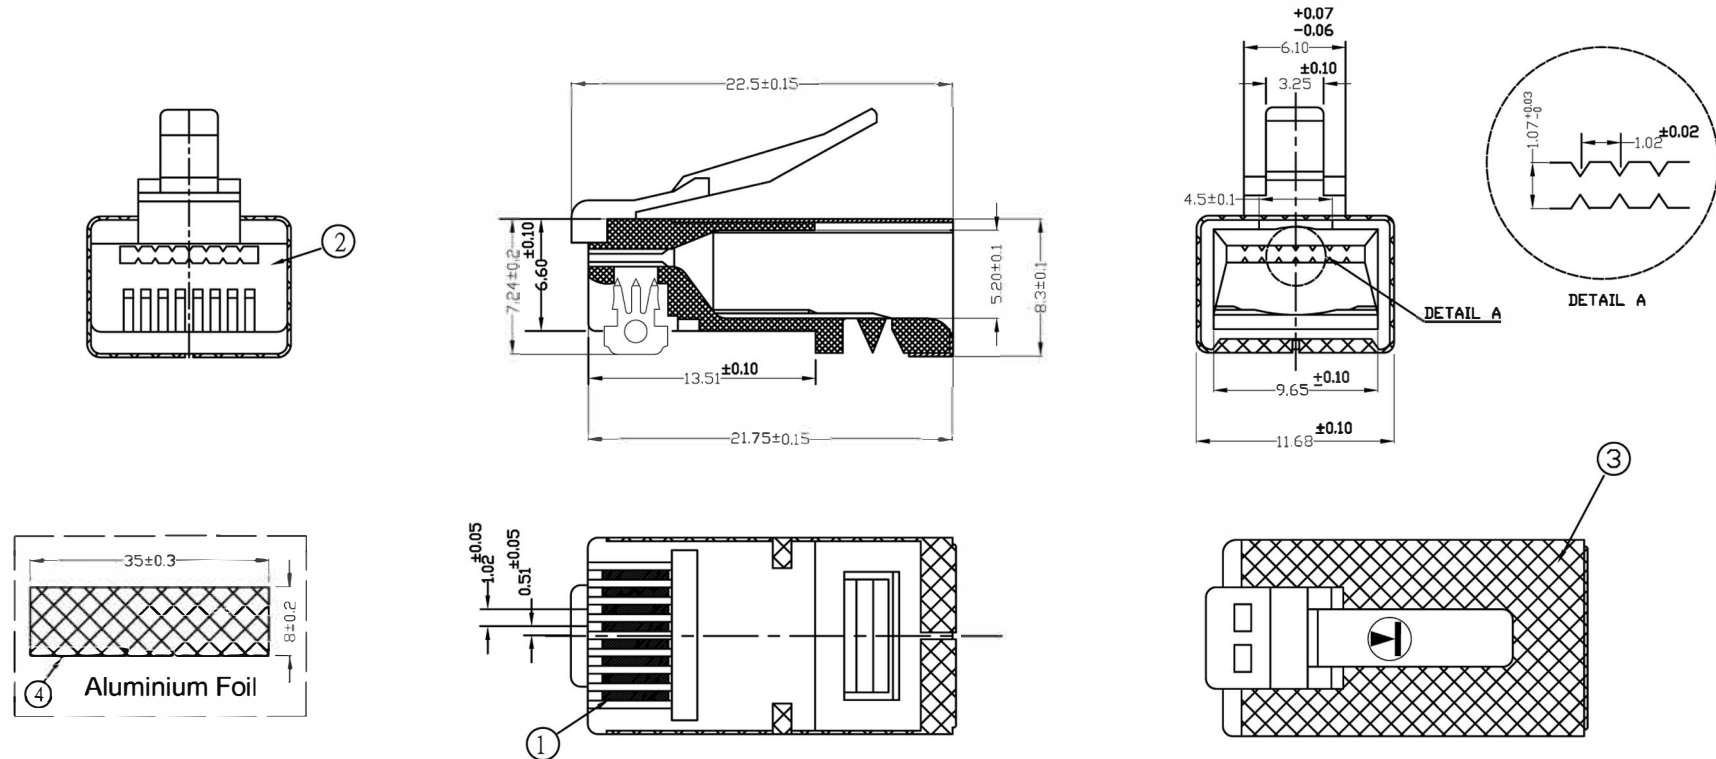

SPECIFICATION:

1.MATERIAL:

HOUSING PLASTIC:POLYCARBONATE UL94-V0

CONTACT Pin: 50 μ m/1.27 μ m gold plating over nickel over phosphor bronze


SHELL: PHOSPHOR BRONZE

2.ELECTRICAL:

CONTACT RESISTANCE:30 MILLIOHM MAX,
INSULATION RESISTANCE:DC300V,100 MEGOHM MIN,
DIELECTRIC WITHSTANDING VOLTAGE:300V AC FOR 1 MINUTE

3.MECHANICAL:

WORKING TEMPERATURE:-25-55°C
DURABILITY:1000 MATING CYCLES MIN
TENSILE STRENGTH BETWEEN PLUG AND JACK IS HIGHER THAN 7.7kgf



④	Aluminium Foil	Aluminium	35X8mm
③	SHELL	Bronze	8P
②	Housing	PC	8P8C-5.2
①	CONTACT Pin	PHOSPHOR BRONZE	50 μ m/1.27 μ m gold plating over nickel over phosphor bronze 3-fork
NO.	NAME	Material	Specification